

BELT CONVEYORS

BELT CONVEYORS

Akyurek Belt conveyor type T.BELT-014 is made up of standard elements which, when correctly combined, can easily be fitted into any conveying installation.

The Akyurek Belt Conveyor is manufactured in galvanized steel and or Painted and designed in a light and easy-to-assemble modular system.


Type T.BELT-014 is designed with guide rollers which is quiet and have low power consumption in relation to their capacity. There is also a possibility for transport at an upward angle of up to 30° using carriers. The Belt conveyors is well-suited to safe and effective transportation of most materials.

Standard equipment:


- Directly mounted gear motor
- Belt Support rollers
- Returning rollers
- Belt Tensioner
- Profile Constructed Body
- Suitable Belt for requested Task
- Painted Body

Accessories:


- Inlet hoppers
- Outlet skirts/outlet hoppers
- Cover for top/bottom
- Speed control monitor
- Runners for adjustable support fittings
- Belt guide rollers
- Belt scraper internal
- Belt scraper external
- Side extensions
- Oil resistant belt
- Outlet divider
- Automated Tensioner
- Galvanized Body

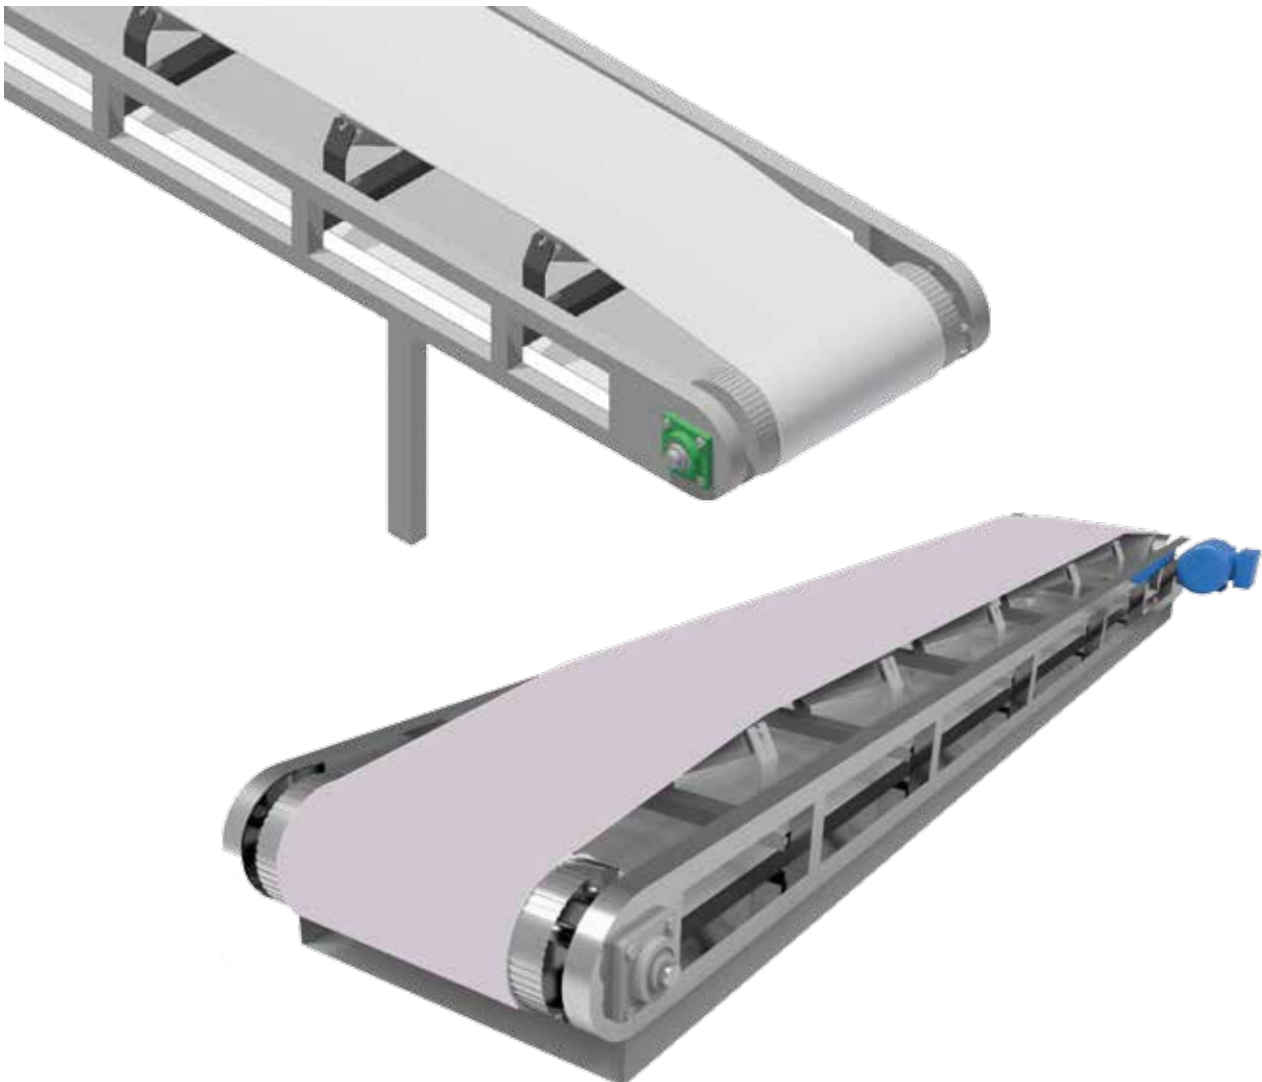


MODEL	T.BELT 023-30		
Belt Length (meter)	0-3	4-6	6-10
Belt Width (mm)	300		
Motor (kW-RPM)	0.37-70	0.55-70	0.75-70
Distance Between Rolls (Sheet Body) (mm)	530		
Distance Between Rolls (Profile Body) (mm)	500		
Capacity [m ³ /hour] (tph)	5 to 10		




MODEL	T.BELT 023-40					
Belt Length (meter)	0-3	3,5-6	6,5-9	9,5-14	14,5-25	25,5-35
Belt Width (mm)	400					
Motor (kW-RPM)	0,55-70	0,75-70	1,1-70	1,5-70	2,2-70	3-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m ³ /hour] (tph)	10 to 15					




MODEL	T.BELT 023-50					
Belt Length (meter)	0-3	3,5-6	6,5-9	9,5-14	14,5-25	25,5-35
Belt Width (mm)	500					
Motor (kW-RPM)	0,75-70	1,1-70	1,5-70	2,2-70	3-70	4-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m ³ /hour] (tph)	15 to 25					




MODEL	T.BELT 023-60					
Belt Length (meter)	0-4	4,5-6	6,5-8	8,5-10	10,5-14	14,5-24
Belt Width (mm)	500					
Motor (kW-RPM)	1,1-70	1,5-70	2,2-70	3-70	4-70	5,5-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m ³ /hour] (tph)	25 to 35					




MODEL	T.BELT 023-80					
Belt Length (meter)	0-4	4,5-6	6,5-8	8,5-10	10,5-14	14,5-24
Belt Width (mm)	500					
Motor (kW-RPM)	1,1-70	1,5-70	2,2-70	3-70	4-70	5,5-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m ³ /hour] (tph)	25 to 35					



MODEL	T.BELT 023-100					
Belt Length (meter)	0-4	4,5-6	6,5-8	8,5-10	10,5-14	14,5-24
Belt Width (mm)	500					
Motor (kW-RPM)	1,1-70	1,5-70	2,2-70	3-70	4-70	5,5-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m ³ /hour] (tph)	25 to 35					



BELT CONVEYORS

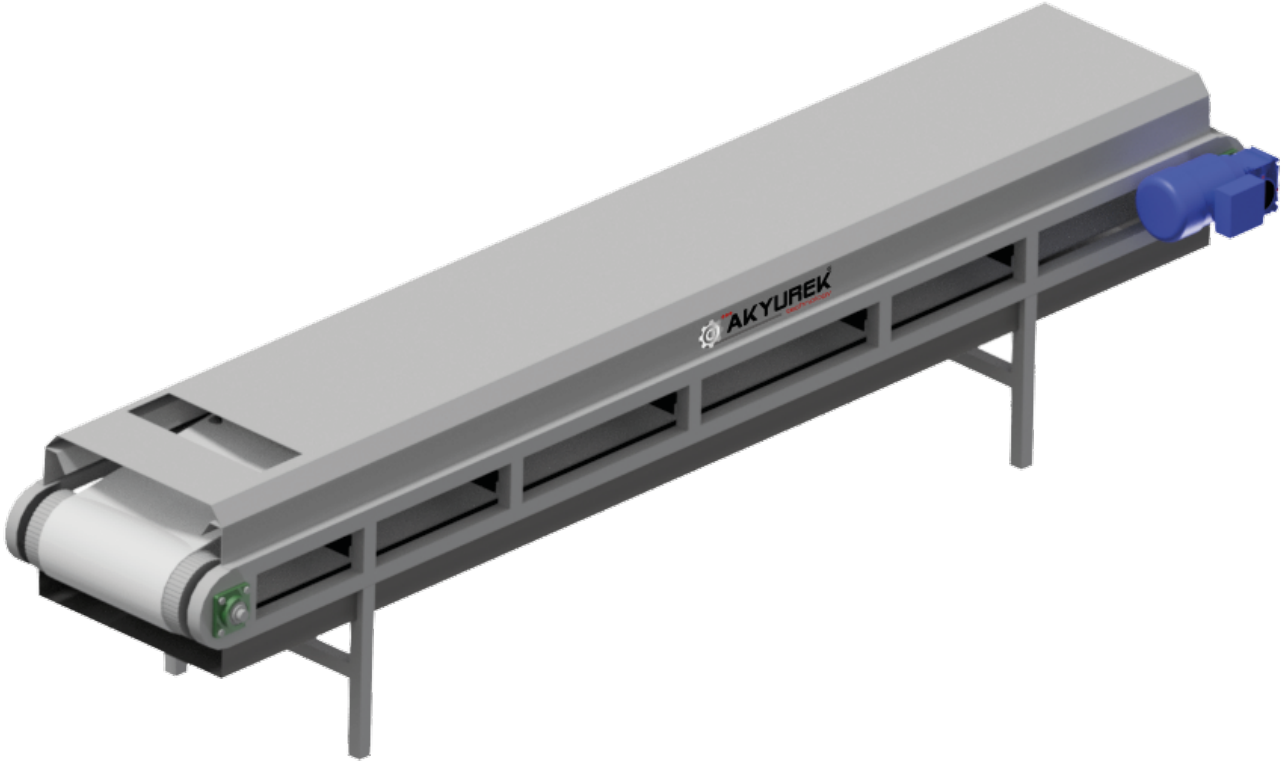

Akyürek Makine A.Ş.

Karaduvar Mahallesi 65117 Sokak
No:37 Mersin / TÜRKİYE

Telefon: +90 324 237 47 48 - +90 324 234 47 59

+90 324 237 37 14 - +90 324 237 47 10

Faks: +90 324 234 47 07

E-Posta: info@akyurekltd.com

Web: www.akyurekltd.com



Akyürek Makine A.Ş.

Karaduvar Avenue 65117 Street
No:37 Mersin / TÜRKİYE

Phone: +90 324 237 47 48 - +90 324 234 47 59

+90 324 237 37 14 - +90 324 237 47 10

Fax: +90 324 234 47 07

E-Mail: info@akyurekltd.com

Web: www.akyurekltd.com



+90 444 6 259

www.akyurekltd.com

Akyürek Kardesler San.Tic.Ltd.Sti. Have all the copyrights of the information and pictures provided in this catalogue. We have all rights to do necessary adjustments on the product & these changes may not reflect on the catalogue at the moment of production. We will do our utmost to inform you all the changes if and when.